

CLEAN & CONTEMPORARY CHARM

A fresh dimension to a time-honored classic. Without the center stile, the door is left with a cleaner and more contemporary look while maintaining the classic charm of the Short Panel Carriage design.

COLORS





The ColorSelect™ process uses a Sherwin Williams Polane® Solar Reflective Polyurethane Enamel that utilizes the latest technologies to provide a durable, heat-repelling coating.

*Not available in Series 24 **Available in ThermoSteel $^{\rm Im}$ only. ***Available in ThermoGuard $^{\rm Im}$ and TS-138 only. Due to the printing process, colors may vary.

INSULATION

	ThermoGuard™	ThermoSteel™	TS-138	Series 24
Foam/Insulate	Polyurethane	Polystyrene	Polystyrene	Plain Steel/ T-Bond
R-Value	18.0	9.25	7.50	T-Bond: 7.0
U-Factor (Btu/hr/ft2/F)	0.136	0.220	0.264	0.376
Thickness	2 inches	2 inches	13% inches	2 inches
Exterior Steel	27 gauge	25 gauge	27 gauge	24 gauge
Interior Steel	27 gauge	25 gauge	27 gauge	N/A
Warranty* Excludes Springs	Lifetime	Lifetime	25 years	Lifetime
	Time			

HARDWARE



Standard Handles



GLASS
















*Tempered only. All other glass is available in both tempered and untempered.

WINDOWS

*For full warranty details contact your Midland dealer

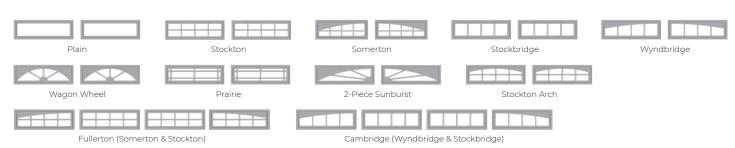



YOUR LOCAL GARAGE DOOR DEALER